

JS LED®

ShenZhen
Lighting®

JS LED®

ShenZhen
Lighting®



JS LED Technology Corporation

Add.: 8787 W. Belfort Ave. Unit 900, Houston, TX 77031
Add.: 1318 Maine Ave. Baldwin Park, CA 91706

Tel. : 626-338-8291/713-325-2171

Web: www.jsledpower.com

ShenZhen Lighting Technology Corporation

Add.: Floor 5, Building B, Hansheng Industrial Park, Xingguang
Xinghui 1st Street, Huangjiang Town, Dongguan, Guangdong, China

Tel. : 86-769-82260508

Web: www.shenzhenlighting.com



2026

ECO Lighting Technology and Solutions



JS LED Technology Corporation is a fast-growing US company dedicated exclusively to designing and distributing high quality LED products in the commercial and residential lighting and signage industry since 2005.

We fully stock our products in California and Texas. Our products are certified by UL, ETL, DLC, ES, Title 24 etc.

We can also work with you to develop OEM lighting products according to your desired requirements and specifications.

We have production factories managed by Shenzhen Lighting Technology Corporation located in China, Cambodia and Vietnam.

Our factories specialize in the manufacturing and design of LED light fixtures and lamps.

We have many production lines with advanced automated assembly areas in our factory.

Our Quality Control Department follows strict guidelines to ensure that our final products are up to your standards.

We're known mostly for selling industrial and residential lighting products.

Some of our most popular products include panel lights, troffer lights, down lights, area lights, canopy lights, high bay lights, flood lights, wall packs and many others.



CONTENTS

01/	The Area Light	16/	LED Panel Frame
02/	LED UFO High Bay	17/	Architectural LED Linear Fixture
03/	LED Wall Pack	18/	Universal accessories
04/	LED Canopy LIGHT	19/	LED Sport Light
05/	LED Flood Light	20/	Driver
06/	LED Panels	21/	LED Strip&LED Rope Light
07/	LED Exit Lights	22/	LED FLEX NEON
08/	LED Troffer	23/	LED Module
09/	LED Linear Strip	24/	Up Downlight
10/	T8 Tube	25/	LED Mirror Light
11/	Slim Downlights	26/	Other Lighting
12/	LED Downlights	27/	Emergency Driver
13/	Explosion-proof light	28/	Controller&AC Switch &Sensor
14/	LED Tri-proof lamp	29/	Pole and Bracket
15/	LED Linear High Bay	30/	Body Strip

THE AREA LIGHT

APPLICATION

COMMERCIAL AND RESIDENTIAL PARKING LOTS
ALONGSIDE ROADWAYS
SHOPPING CENTERS AND
ENTERTAINMENT VENUES



High Brightness Output:
The Area Light provide high brightness illumination, ensuring safety in nighttime or low-light environments.

Energy Efficient and Eco-Friendly:
These fixtures have low energy consumption, effectively reducing electricity costs, and are free of harmful substances, meeting environmental standards.

Weather Resistant:
The Area Light are typically designed to be waterproof and corrosion-resistant, making them suitable for various weather conditions.



LED UFO HIGH BAY

APPLICATION

COMMERCIAL AND RESIDENTIAL PARKING LOTS
ALONGSIDE ROADWAYS
SHOPPING CENTERS AND
ENTERTAINMENT VENUES



High Brightness and Wide Illumination:
LED UFO high bay lights provide high brightness output and wide illumination angles, suitable for spaces with high ceilings.

Energy-Efficient Design:
These fixtures are designed for high energy efficiency, significantly reducing energy consumption and electricity costs.

Long Lifespan:
The lifespan of LED UFO high bay lights typically reaches tens of thousands of hours, reducing the frequency of replacements and maintenance costs.



Picture			
Input Power	Adjustable Power:70W/100W/150W	300W	Adjustable Power:200W/240W/300W
Model	SZ-PK150W-H1-H-ACP/SZ-PK150W-H1-ACP	SZ-PK300W-H1-X000K/SZ-PK300W-H1-ACP/SZ-PK300W-H1H-ACP	SZ-PK300W-H1-H-ACP (Y)
Input Voltage	120-277V/277-480V	120-277V/277-480V	120-277V
LED Type	2835	2835	2835
Viewing Angle	Type III	Type III	Type III
CRI	>80	>80	>70
Dimmable	Yes	Yes	Yes
Lumen Efficacy	130LM/W	130LM/W	150LM/W
Color temperature	Adjustable:3000K/4000K/5000K or 4000K/5000K/6500K	5000K/6500K	Adjustable:3000K/4000K/5000K or 4000K/5000K/6500K
Waterproof Rating	IP65	IP65	IP65
Safety Certification	UL & DLC5.1 Photocell Motion Sensor	UL & DLC5.1 Photocell Motion Sensor	UL & DLC5.1 Photocell(Default) Motion Sensor
Optional	/	Adjustable CCT: 4000K/5000K/6500K & Power: 200W/240W/300W	/

Picture			
Input Power	Adjustable: 240W/300W/400W/500W	Adjustable:60W/80W/100W	Adjustable:100W/120W/150W
Model	SZ-PK500W-LS-ACP/SZ-PK500W-HD-ACP	SS-BL02-100/80/60W-H-TCP	SZ-RL150W-P-ACP
Input Voltage	120-277V/277-480V	120-277V	120-277V
LED Type	2835	2835	2835
Viewing Angle	Type III	120	Type III
CRI	>70	>70	>70
Dimmable	Yes	Yes	Yes
Lumen Efficacy	160LM/W	120LM/W	150LM/W
Color temperature	Adjustable: 4000K/5000K/6500K	Adjustable:3500K/4000K/5000K	Adjustable:3000K/4000K/5000K
Waterproof Rating	IP65	IP65	IP65
Safety Certification	UL Photocell(Default) Motion Sensor	UL & DLC5.1 Photocell(Default) Motion Sensor	UL Photocell(Default) Motion Sensor
Optional	/	/	/

Picture						
Input Power	Adjustable: 60W/80W/100W	Adjustable: 100W/120W/150W	Adjustable: 100W/150W/200W	Adjustable: 100W/150W/200W	Adjustable: 150W/200W/240W	Adjustable: 150W/200W/240W
Model	SZ-HB100W-H-ACP	SZ-HB150W-ACP	SZ-HB200W-H-ACP	SZ-HB240W-H-ACP	SZ-HB240W-H-ACP (Y)	SZ-HB300W-H-5700K (Y)
Input Voltage	120-277V	120-277V	120-277V	120-277V/277-480V	120-277V	120-277V
LED Type	2835	2835	2835	2835	2835	2835
Viewing Angle	110	90	110	110	90	90
CRI	>80	>70	>80	>80	>70	>70
Dimmable	Yes	Yes	Yes	Yes	Yes	Yes
Lumen Efficacy	140LM/W	150LM/W	140LM/W	140LM/W	150LM/W	150LM/W
Color temperature	Adjustable: 3500K/5000K/6500K	Adjustable: 4000K/5000K/6000K	Adjustable: 4000K/5000K/6000K	Adjustable: 4000K/5000K/6000K	Adjustable: 4000K/5000K/6000K	5700K
Waterproof Rating	IP65	IP65	IP65	IP65	IP65	IP65
Safety Certification	UL & DLC5.1	UL & DLC5.1				
Optional	Motion Sensor	Motion Sensor				



LED WALL PACK

Weather Resistant:
LED wall packs are typically designed to be waterproof and corrosion-resistant, making them suitable for outdoor use.

Energy Efficient:
These fixtures are designed for high energy efficiency, effectively reducing energy consumption and electricity costs.

Flexible Installation:
LED wall packs offer versatile installation options, allowing for different mounting heights and angles as needed.



APPLICATION
BUILDING EXTERIOR,
PARKING LOT
WALKWAY AND ENTRANCE LIGHTING

LED CANOPY LIGHT

High Brightness Output:
LED canopy lights provide high brightness illumination, suitable for various outdoor and semi-outdoor environments

Weather Resistant:
These fixtures are typically designed to be waterproof and corrosion-resistant, capable of withstanding harsh weather conditions.

Energy-Efficient Design:
LED canopy lights are designed for high energy efficiency, effectively reducing energy consumption and electricity costs..

APPLICATION
GAS STATION,
COMMERCIAL BUILDING ENTRANCES
PARKING LOTS AND GARAGES



Picture				
Input Power	Adjustable: 18W/25W/30W	Adjustable: 40W/60W/80W	Adjustable: 80W/100W/120W	Adjustable: 100W/120W/150W
Model	SZ-SWP30W-ACP	SZ-WP80/60/40W-HP-ACP	SZ-WP120/100/80W-HP-ACP (PC)	SZ-SWP150W-HP-ACP
Input Voltage	120-277V	120-277V	120-277V	120-277V
LED Type	2835	2835	2835	2835
Viewing Angle	120	80*110	90	TypeIV
CRI	>70	>70	>80	>80
Dimmable	Yes	Yes	Yes	Yes
Lumen Efficacy	120LM/W	130LM/W	130LM/W	130LM/W
Color temperature	Adjustable: 3000K/4000K/5000K	Adjustable: 4000K/5000K/6000K	Adjustable: 3000K/4000K/5000K	Adjustable: 3500K/5000K/6500K
Waterproof Rating	IP65	IP65	IP65	IP65
Safety Certification	UL	UL & DLC5.1	UL & DLC5.1	ETL & DLC5.1
Photocell	Yes	Yes	Yes	Yes

Picture				
Input Power	Adjustable: 20W/30W/40W	Adjustable: 80W/100W/120W	Adjustable: 80W/100W/120W	Adjustable: 60W/80W/100W/120W
Model	SZ-FWP40W-HP-ACP	SZ-FWP120W-HP-ACP	SZ-RWP120W-AP-ACP	SZ-RWP120W2-ACP
Input Voltage	120-277V	120-277V	120-277V	120-277V
LED Type	2835	2835	2835	2835
Viewing Angle	Type III	Type III	110*95	Type III
CRI	>70	>70	>80	>80
Dimmable	Yes	Yes	Yes	Yes
Lumen Efficacy	130LM/W	130LM/W	130LM/W	150LM/W
Color temperature	Adjustable: 3000K/4000K/5000K	Adjustable: 3000K/4000K/5000K	5700K	Adjustable: 3000K/4000K/5000K or 3500K/5000K/6500K
Waterproof Rating	IP65	IP65	IP65	IP65
Safety Certification	UL & DLC5.1	UL & DLC5.1	UL	UL & DLC5.1
Photocell	Yes	Yes	Yes	Yes

Picture					
Input Power	40W	75W	Adjustable: 60W/80W/100W	Adjustable: 60W/80W/100W	150W
Model	SZ-CNP40W	SZ-CNP75W	SZ-CNP100/80/60W-H-ACP	SZ-CNP100/80/60W-H-ACP	SZ-CNP150W-H-5000K/5700
Input Voltage	120-277V	120-277V	120-277V	120-277V	120-277V
LED Type	3030	3030	2835	2835	2835
Viewing Angle	120	120	120	120	120
CRI	>70	>70	>80	>80	>80
Dimmable	/	/	Yes	Yes	Yes
Lumen Efficacy	130LM/W	130LM/W	135LM/W	135LM/W	140LM/W
Color temperature	5700K	5700K	Adjustable:3500K/4000K/5000K	Adjustable:3500K/4000K/5000K	5000K/5700K
Waterproof Rating	IP65	IP65	IP65	IP65	IP65
Safety Certification	UL	UL	UL & DLC5.1	UL & DLC5.1	ETL & DLC5.1

Picture					
Input Power	Adjustable: 120W/150W/180W	240W	150W	240W	Adjustable: 150W/180W/200W/240W
Model	SZ-CNP180W-ACP	SZ-CNP240W-CCT	SZ-CNP150WSAEW (J)	SZ-CNP240W-5700K (J)	SZ-CNP240WJ-ACP
Input Voltage	120-277V	120-277V	120-277V	120-277V	120-277V
LED Type	2835	3030	3030	2835	2835
Viewing Angle	120	120	120	120	120
CRI	>80	>80	>80	>80	>80
Dimmable	Yes	Yes	Yes	Yes	Yes
Lumen Efficacy	130LM/W	140LM/W	140LM/W	140LM/W	140LM/W
Color temperature	Adjustable:4000K/5000K/5700K	Adjustable:5000K/5700K/6500K	5700K	5700K	Adjustable:4000K/5000K/5700K/6500K
Waterproof Rating	IP65	IP65	IP65	IP65	IP65
Safety Certification	ETL	/	UL	/	UL & DLC5.1



LED FLOOD LIGHT

APPLICATION

OUTDOOR EVENTS,
CONSTRUCTION SITES,
SPORTS VENUES,
BILLBOARD LIGHTING,

High Energy Efficiency:
LED Flood Lights have lower energy consumption, which can save on electricity costs.

Long Lifespan:
LED Flood Lights typically have a lifespan of over 25,000 hours, reducing the frequency of replacements

Waterproof Design:
Many LED Flood Lights come with waterproof ratings, making them suitable for outdoor use

Easy Installation:
LED Flood Lights are typically designed for easy installation, suitable for various settings



LED PANELS

APPLICATION

OFFICE LIGHTING, COMMERCIAL SPACES,
CONFERENCE ROOMS, HOME LIGHTING,
HOSPITALS AND SCHOOLS

Ultra-Slim Design:
LED Panels are typically designed to be very slim, saving space and making installation easy

High Color Rendering:
LED Panels provide a high Color Rendering Index (CRI), ensuring colors appear true to life

Energy-Efficient and Eco-Friendly:
LED Panels are energy-efficient, reducing energy consumption and meeting environmental standards.

Flicker-Free Technology:
Many LED Panels use flicker-free technology, protecting the eyes and reducing visual fatigue

Multiple Color Temperature Options:
LED Panels offer various color temperature options to suit different lighting needs in various settings.



Picture			
Input Power	Adjustable: 15W/20W/35W	Adjustable: 35W/60W/80W	Adjustable: 100W/120W/150W
Model	SZ-FL35W-HP-ACP	SZ-FL80W-HP-ACP	SZ-FL150W-HP-ACP
Input Voltage	120-277V	120-277V	120-277V
LED Type	2835	2835	2835
Viewing Angle	105	105	105
CRI	>70	>70	>70
Dimmable	Yes	Yes	Yes
Lumen Efficacy	140LM/W	140LM/W	140LM/W
Color temperature	Adjustable: 3000K/4000K/5000K	Adjustable: 3000K/4000K/5000K	Adjustable: 3000K/4000K/5000K
Waterproof Rating	IP65	IP65	IP65
Safety Certification	UL	UL	UL
Photocell	Yes	Yes	Yes
Optional	U Bracket or T Bracket	U Bracket or T Bracket	U Bracket or T Bracket

Picture			
Input Power	Adjustable: 20W/25W/30W/35W/40W	Adjustable: 20W/25W/30W/35W/40W	Adjustable: 30W/40W/50W/60W/72W
Model	SZ-PL22-A40W-CCT	SZ-PL14-A40W-CCT	SZ-PL24-A72W-CCT
Input Voltage	120-277V	120-277V	120-277V
LED Type	2835	2835	2835
Viewing Angle	120	120	120
CRI	>80	>80	>80
Dimmable	Yes	Yes	Yes
Lumen Efficacy	125LM/W	125LM/W	125LM/W
Dimension	2*2FT	1*4FT	2*4FT
Color temperature	Adjustable: 3500K/4000K/5000K/5700K/6500K	Adjustable: 3500K/4000K/5000K/5700K/6500K	Adjustable: 3500K/4000K/5000K/5700K/6500K
Safety Certification	ETL & DLC5.1	ETL & DLC5.1	ETL & DLC5.1
Optional	Emergency Driver, Sensor	Emergency Driver, Sensor	Emergency Driver, Sensor



LED EXIT LIGHTS

APPLICATION

COMMERCIAL BUILDINGS,SCHOOLS,
HOSPITALS,SHOPPING MALLS,
PUBLIC TRANSPORT FACILITIES

Picture						
Input Power	1.2W/per head	1.2W/per head	1.5W	3W	1.2W/per head	
Model	SZ-EL-1.2W (S)	SZ-EL-1.2W (R-W)	SZ-EXIT-Remote (IP65) -1 SZ-EXIT-Remote (IP65-P) -1	SZ-EXIT-Remote (IP65) -2 SZ-EXIT-Remote (IP65-P) -1	SZ-EL-1.2W	
Input Voltage	120V/277V	120V/277V	DC 9.6V	DC 9.6V	120-277V	
LED Type	2835	2835	2835	2835	2835	
CRI	>70	>70	>70	>70	>70	
Emergency Time	>90min	>90min	/	/	>90min	
Color temperature	6500K	6500K	6500K	6500K	6500K	
Waterproof Rating	IP20	IP65	IP65	IP65	IP20	
Safety Certification	UL	UL	UL	UL	UL	

Picture				
Input Power	1.5W/per head	2W/per head	/	1.2W/per head
Model	SZ-EXIT-1.5W	SZ-EXIT-2W (R/G)	SZ-EXIT-RG	SZ-EXIT-1.2W (R/G)
Input Voltage	120V/277V	120V/277V	120V/277V	120-277V
LED Type	2835	2835	/	2835
CRI	>70	>70	/	>70
Emergency Time	>90min	>90min	>90min	>90min
Color temperature	6500K,EXIT:Red/Green	4000K,EXIT:Red/Green	EXIT:Red/Green	6500K,EXIT:Red/Green
Waterproof Rating	IP20	IP20	IP20	IP20
Safety Certification	UL	UL	UL	UL

LED TROFFER

APPLICATION

COMMERCIAL OFFICE SPACES,CLASSROOMS,
HOSPITAL CORRIDORS,RETAIL STORES,
CONFERENCE ROOMS

Picture			
Input Power	Adjustable: 15W/20W/25W/30W/40W	Adjustable: 20W/25W/30W/35W/40W	Adjustable: 25W/30W/40W/45W/50W
Model	SZ-TR14-A40W-CCT	SZ-TR22-40W5-ACP	SZ-TR24-50W5-ACP
Input Voltage	120-277V	120-277V	120-277V
LED Type	2835	2835	2835
Viewing Angle	120	120	120
CRI	>80	>80	>80
Dimmable	Yes	Yes	Yes
Lumen Efficacy	125LM/W	125LM/W	125LM/W
Dimension	1*4FT	2*2FT	2*4FT
Color temperature	Adjustable: 3500K/4000K/5000K/5700K/6500K	Adjustable: 3000K/3500K/4000K/5000K/6000K	Adjustable: 3000K/3500K/4000K/5000K/6000K
Safety Certification	ETL & DLC5.1	ETL & DLC5.1	ETL & DLC5.1
Optional	Sensor	Sensor	Sensor



LED LINEAR STRIP

APPLICATION

FACTORIES, WAREHOUSES, AND WORKSHOPS
SUPERMARKETS, PARKING LOTS,
AND SHOPPING MALLS

Slim Design:


LED linear strips are typically designed to be ultra-slim, making them easy to install in tight spaces and saving room.

High Energy Efficiency:

These fixtures are designed for high energy efficiency, effectively reducing energy consumption and electricity costs.

Dimmable Functionality:

Many LED linear strips support dimming functionality, allowing users to adjust brightness as needed.

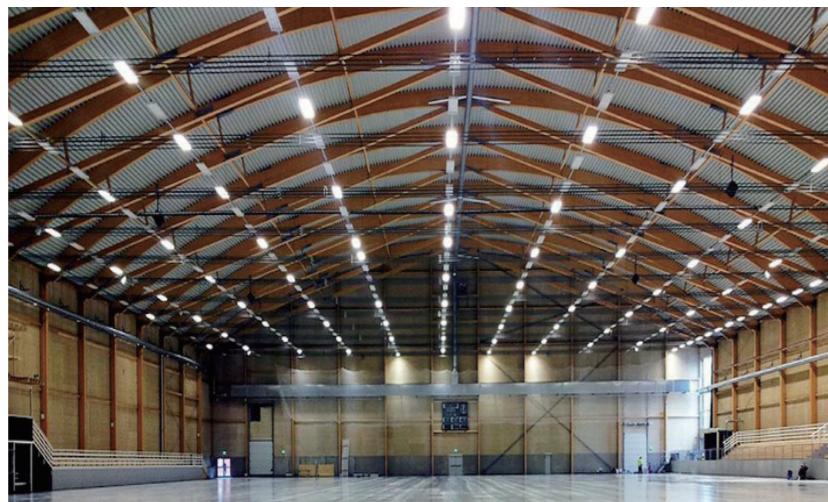

T8 TUBE

APPLICATION

OFFICE LIGHTING,
COMMERCIAL RETAIL
INDUSTRIAL ENVIRONMENTS

Energy Efficient:

T8 tubes are more energy-efficient compared to traditional fluorescent tubes, effectively reducing energy consumption and electricity costs.

Long Lifespan:

The lifespan of T8 tubes typically reaches tens of thousands of hours, reducing the frequency of replacements and maintenance costs.

High Compatibility:

T8 tubes are often compatible with existing fluorescent fixtures, making them easy to replace and install.



Picture			
Input Power	Adjustable: 10W/15W/20W	Adjustable: 24W/32W/40W	Adjustable: 40W/50W/64W
Model	SZ-LS20W-2FT-ACP	SZ-LS40W-4FT-ACP	SZ-LS64W-8FT-ACP
Input Voltage	120-277V	120-277V	120-277V
LED Type	2835	2835	2835
Viewing Angle	120	120	120
CRI	>80	>80	>80
Dimmable	Yes	Yes	Yes
Lumen Efficacy	140LM/W	140LM/W	140LM/W
Dimension	2FT	4FT	8FT
Color temperature	Adjustable: 3500K/4000K/5000K	Adjustable: 3500K/4000K/5000K	Adjustable: 3500K/4000K/5000K
Safety Certification	UL & DLC5.1	UL & DLC5.1	UL & DLC5.1
Optional	Motion Sensor	Motion Sensor	Motion Sensor
	Emergency Driver	Emergency Driver	Emergency Driver

Picture			
Input Power	24W	24W & 60W	32W & 40W
Model	SZ-T8-4FT-24 (G13)	SZ-T8-4FT-24/SZ-T8-8FT-60	SZ-T8-5FT-32 (C)/SZ-T8-6FT-40 (C)
Input Voltage	100-277V	100-277V	100-277V
LED Type	2835	2835	2835
Viewing Angle	120	120	270
CRI	>80	>80	>80
Base	G13	Integrated	Integrated
Cover	Clear/Milky/Stripy	Stripy	Stripy
Lumen Efficacy	130LM/W	130LM/W	120LM/W
Dimension	4FT	4FT & 8FT	5FT & 6FT
Color temperature	6500K	6500K	6500K
Safety Certification	UL	UL	UL
Installation	Type B	Type B	Type B

Picture		
Input Power	Adjustable: 10W/12W/15W/18W/24W	Adjustable: 20W/25W/30W/40W/50W
Model	SZ-T8-4FT-24(G13 ACP AB)	SZ-T8-8FT-50 (FA8 ACP)
Input Voltage	100-277V	100-277V
LED Type	2835	2835
Viewing Angle	120	120
CRI	>80	>80
Base	G13	FA8
Cover	Clear/Milky	Clear/Milky
Lumen Efficacy	130LM/W	130LM/W
Dimension	4FT	8FT
Color temperature	Adjustable:3000K/3500K/4000K/5000K/6000K/6500K	Adjustable:3000K/3500K/4000K/5000K/6000K/6500K
Safety Certification	UL	UL
Installation	Type A+B	Type B



SLIM DOWNLIGHTS

LED DOWNLIGHTS


APPLICATION

HOME LIGHTING COMMERCIAL SPACES,
LED DOWNLIGHTS, BATHROOM LIGHTING
EXHIBITIONS AND MUSEUMS,

Picture	6W	9W	15W	24W
	SZ-DL6W3-SP (5CCT)	SZ-DL9W4-SP (5CCT)	SZ-DL15W6-SP (5CCT)	SZ-DL24W8-SP (3CCT)
Input Power	6W	9W	15W	24W
Model	120V	120V	120V	120V
Input Voltage	2835	2835	2835	2835
LED Type	120	120	120	120
Viewing Angle	>80	>80	>80	>80
CRI	Triac	Triac	Triac	Triac
Dimmable	70LM/W	88LM/W	90LM/W	90LM/W
Lumen Efficacy	3inch	4inch	6inch	8inch
Dimension	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 4000K / 5000K / 6000K
Safety Certification	UL	UL	UL	UL
Optional	/	/	/	/

Picture	10W	15W	9W	12W
	SZ-DL10W4-SP (RGBCW)	SZ-DL15W6-SP (RGBCW)	SZ-DL9W4-SP-R-CCT-277V	SZ-DL12W6-SP-R-CCT-277V
Input Power	120V	120V	120-277V	120-277V
Model	2835	2835	2835	2835
Input Voltage	120	120	100	100
LED Type	>80	>80	>90	>90
Viewing Angle	Triac	0-10V	0-10V	0-10V
CRI	70LM/W	70LM/W	80LM/W	85LM/W
Dimmable	4inch	6inch	4inch	6inch
Lumen Efficacy	RGB+2700-6500K(Wifi+Bluetooth Control)	RGB+2700-6500K(Wifi+Bluetooth Control)	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension	UL	UL	ETL	ETL
Safety Certification	/	/	/	/
Optional				

Picture	15W	Adjustable 20W/22W/24W	Adjustable 24W/28W/32W	Adjustable 9W/12W/15W
	SZ-DL15W6-CL-CCT	SZ-DL24W12-SMP-ACP	SZ-DL32W15-SMP-ACP	SZ-DL15W6-SP-ACP (EM)
Input Power	120V	120V	120V	120V
Model	2835	2835	2835	2835
Input Voltage	120	120	120	120
LED Type	>90	>80	>80	>85
Viewing Angle	Triac	Triac	Triac	Triac
CRI	75LM/W	110LM/W	110LM/W	90LM/W
Dimmable	6inch	12inch	15inch	6inch
Lumen Efficacy	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension	ETL & ES	ETL	ETL	UL
Safety Certification	PIR Sensor & Light Sensor	/	/	Emergency Power: 4.2W (Default)
Optional				

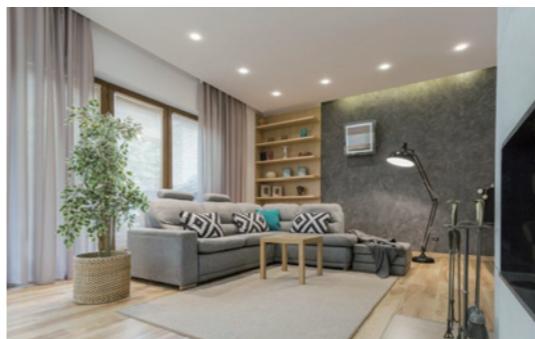

Picture	9W	15W	Adjustable: 6W/9W/12W	Adjustable: 10W/14W/18W
Input Power	SZ-DL9W4-SP (5CCT) (DL)	SZ-DL15W6-SP (5CCT) (DL)	SZ-DL12W4-ACP-277V	SZ-DL18W6-ACP-277V
Model	120V	120V	120-277V	120-277V
Input Voltage	2835	2835	2835	2835
LED Type	100	100	100	100
Viewing Angle	>80	>80	>90	>90
CRI	Triac	Triac	0-10V	0-10V
Dimmable	88LM/W	87LM/W	83LM/W	83LM/W
Lumen Efficacy	4inch	6inch	4inch	6inch
Dimension	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K
Safety Certification	UL	UL	ETL & ES	ETL & ES

Picture	10W	15W	12W	15W
	SZ-DL10W4-RG-CCT-R-277V	SZ-DL15W6-RG-CCT-R-277V	SZ-DL12W4-SP-S-CCT-277V	SZ-DL15W6-SP-S-CCT-277V
Input Power	100-277V	100-277V	100-277V	100-277V
Model	2835	2835	2835	2835
Input Voltage	36° Horizontal 360° & Tilt 90° adjustment	55° Horizontal 360° & Tilt 90° adjustment	120	120
LED Type	>80	>80	>80	>80
Viewing Angle	0-10V	0-10V	0-10V	0-10V
CRI	90LM/W	100LM/W	80LM/W	80LM/W
Dimmable	4inch	6inch	4inch	6inch
Lumen Efficacy	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension	ETL	ETL	ETL	ETL
Safety Certification	/	/	/	/

Picture	Adjustable: 10W/13W/16W	Adjustable: 12W/16W/20W	Adjustable: 18W/25W/32W	Adjustable: 20W/28W/35W
	SZ-DL16W4-CD-ACP	SZ-DL20W6-CD-ACP	SZ-DL32W8-CD-ACP	SZ-DL35W10-CD-ACP
Input Power	100-277V	100-277V	100-277V	100-277V
Model	2835	2835	2835	2835
Input Voltage	100	105	105	105
LED Type	>90	>90	>90	>90
Viewing Angle	1-10V	1-10V	1-10V	1-10V
CRI	125LM/W	125LM/W	125LM/W	125LM/W
Dimmable	4inch	6inch	8inch	10inch
Lumen Efficacy	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K	Adjustable: 2700K / 3000K / 3500K / 4000K / 5000K
Dimension	ETL & ES	ETL & ES	ETL & ES	ETL & ES
Safety Certification	/	/	/	/



EXPLOSION-PROOF LIGHT

APPLICATION

FACTORIES, WAREHOUSES, AND WORKSHOPS
SUPERMARKETS, PARKING LOTS,
AND SHOPPING MALLS



Picture		
Input Power	100W	200W
Model	SZ-HRL100W-G90TM-5000K/SZ-HRL100WH-G90TM-5000K	SZ-HRL200W-G90TM-5000K/SZ-HRL200WH-G90TM-5000K
Input Voltage	120-277V/347-480V	120-277V/347-480V
LED Type	3030	3030
Viewing Angle	90	90
CRI	>70	>70
Dimmable	Yes	Yes
Lumen Efficacy	150LM/W	157LM/W
Color temperature	5000K	5000K
Waterproof Rating	IP65	IP65
Safety Certification	UL	UL

LED TRI-PROOF LAMP

APPLICATION

COMMERCIAL AND RESIDENTIAL PARKING LOTS
ALONGSIDE ROADWAYS
SHOPPING CENTERS AND
ENTERTAINMENT VENUES



Tri-proof Design:

LED tri-proof lamps feature waterproof, dustproof, and corrosion-resistant properties, making them suitable for various harsh environments.

High Energy Efficiency:

LED tri-proof lamps are highly energy-efficient, effectively reducing energy consumption and electricity costs.

Long Lifespan:

The lifespan of LED tri-proof lamps typically reaches tens of thousands of hours, reducing the frequency of replacements and maintenance costs.



Picture		
Input Power	Adjustable: 15W/20W/25W	Adjustable: 30W/40W/54W
Model	SZ-VT25W-2FT-ACP	SZ-VT54W-4FTM-5000K (ACP)
Input Voltage	120-277V	120-277V
LED Type	2835	2835
Viewing Angle	120	120
CRI	>80	>80
Dimmable	Yes	Yes
Lumen Efficacy	140LM/W	130LM/W
Dimension	2FT	4FT
Color temperature	Adjustable: 3000K/3500K/4000K/5000K/6500K	Adjustable: 3000K/4000K/5000K
Waterproof Rating	IP65	IP65
Safety Certification	ETL & DLC5.1	UL



LED LINEAR HIGH BAY

APPLICATION

WAREHOUSE LIGHTING,
INDUSTRIAL FACILITIES, SPORTS HALLS,
RETAIL STORES, PARKING GARAGES


High Energy Efficiency:
LED Linear High Bays have low energy consumption, effectively reducing electricity costs.

Long Lifespan:
LED Linear High Bays typically have a lifespan of over 50,000 hours, reducing the frequency of replacements.

Even Light Distribution:
LED Linear High Bays provide even light distribution, reducing shadows and glare.

Durability:
LED Linear High Bays are typically designed with robust housings, making them suitable for use in harsh environments.

Multiple Installation Options:
LED Linear High Bays support various installation methods, such as suspended and fixed mounting, to suit different location requirements.

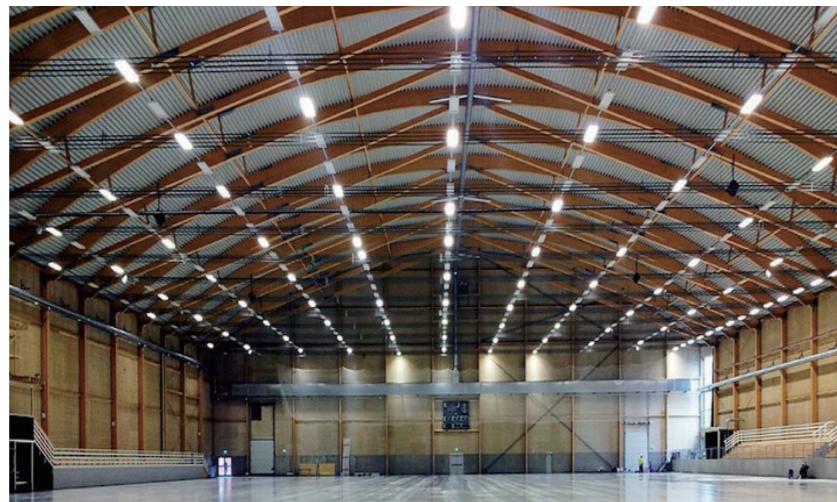

LED PANEL FRAME

APPLICATION

OFFICE LIGHTING,
COMMERCIAL SPACES
MEDICAL FACILITIES

Slim Design:
LED panel frames are typically designed to be ultra-slim, making them easy to install in ceilings and saving space.

High Energy Efficiency:
These panel lights are designed for high energy efficiency, effectively reducing energy consumption and electricity costs.

Even Light Distribution:
LED panel frames provide uniform light distribution, reducing shadows and glare, enhancing visual comfort.




Picture			
Input Power	Adjustable: 90W/120W/165W	Adjustable: 200W/260W/300W	Adjustable: 300W/400W/500W
Model	SZ-LHB165W-2FT-ACP	SZ-LHB300W-4FT-ACP	SZ-LHB500W-4FT-ACP
Input Voltage	120-277V	120-277V	120-277V
LED Type	2835	2835	2835
Viewing Angle	90	90	90
CRI	>80	>80	>70
Dimmable	Yes	Yes	Yes
Lumen Efficacy	135LM/W	150LM/W	140LM/W
Dimension	2FT	4FT	4FT
Color temperature	Adjustable: 4000K/5000K/6000K	Adjustable: 4000K/5000K/6000K	Adjustable: 4000K/5000K/6000K
Safety Certification	ETL & DLC5.1	ETL & DLC5.1	UL
Optional	Motion Sensor	Motion Sensor	Motion Sensor

Picture		
Input Power	Adjustable: 20W/25W/30W/35W/40W	Adjustable: 20W/30W/40W/50W/55W
Model	SZ-PFL22-40W-ACP	SZ-PFL24-55W-ACP
Input Voltage	120-277V	120-277V
LED Type	2835	2835
Viewing Angle	120	120
CRI	>80	>80
Dimmable	Yes	Yes
Lumen Efficacy	120LM/W	120LM/W
Dimension	2*2FT	2*4FT
Color temperature	Adjustable: 3500K/4000K/5000K/5700K/6500K	Adjustable: 3500K/4000K/5000K/5700K/6500K
Safety Certification	ETL & DLC5.1	ETL & DLC5.1



ARCHITECTURAL LED LINEAR FIXTURE

APPLICATION

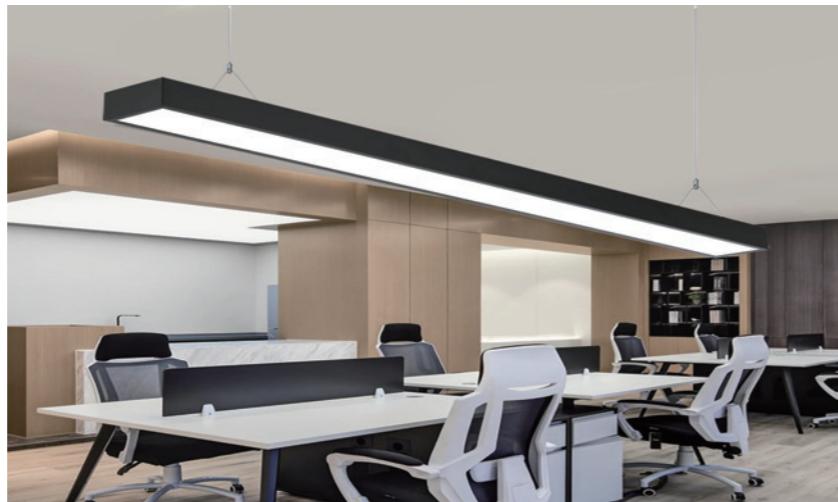COMMERCIAL BUILDINGS, OFFICES,
CONFERENCE ROOMS, EXHIBITIONS,
MUSEUMS, BUILDING FAÇADES, AND PLAZAS

Aesthetic Design:
Architectural LED linear fixtures feature a sleek and modern design that can complement various indoor and outdoor environments.


Dimmable Functionality:
Many architectural LED linear fixtures support dimming functionality, allowing users to adjust brightness as needed.

High Efficiency:
These fixtures typically offer high energy efficiency and long lifespan, effectively reducing energy consumption and maintenance costs.

UNIVERSAL ACCESSORIES



Picture			
Input Power	Adjustable: 15W/20W/25W	Adjustable: 30W/40W/50W	Adjustable: 50W/64W/80W
Model	SZ-ALF25W-2FT-ACP	SZ-ALF50W-4FT-ACP	SZ-ALF80W-8FT-ACP
Input Voltage	120-277V	120-277V	120-277V
LED Type	2835	2835	2835
Viewing Angle	120	120	120
CRI	>80	>80	>80
Dimmable	Yes	Yes	Yes
Lumen Efficacy	115LM/W	115LM/W	115LM/W
Dimension	2FT	4FT	8FT
Color temperature	Adjustable: 3500K/4000K/5000K	Adjustable: 3500K/4000K/5000K	Adjustable: 3500K/4000K/5000K
Safety Certification	UL & DLC5.1	UL & DLC5.1	UL & DLC5.1
Optional	Motion Sensor	Motion Sensor	Motion Sensor
	Emergency Driver	Emergency Driver	Emergency Driver

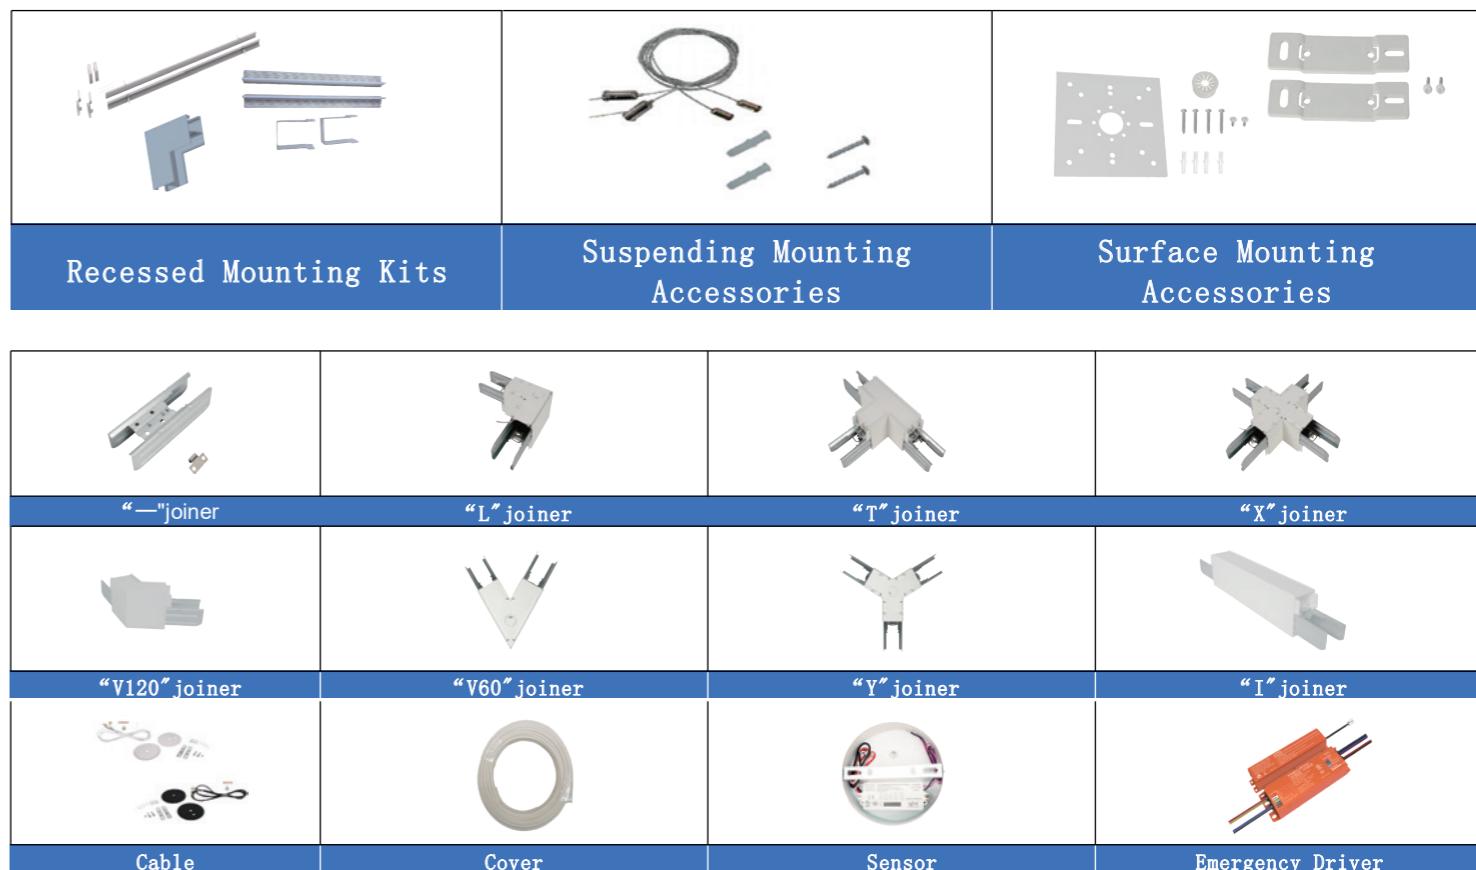

LED SPORT LIGHT

High Brightness Output:
LED sport lights provide extremely high brightness, capable of meeting the lighting needs of various sports activities.

Weather Resistant:
These fixtures are typically designed to be waterproof and corrosion-resistant, making them suitable for use in various weather conditions.

Energy-Efficient Design:
LED sport lights are designed for high energy efficiency, effectively reducing energy consumption and electricity costs while extending lifespan.

APPLICATION

SPORTS VENUE LIGHTING
TRAINING FACILITIES
OUTDOOR EVENTS



DRIVER

APPLICATION

LIGHTING SYSTEMS
LIGHTING CONTROL SYSTEMS
DISPLAY SCREENS



High Stability:
LED drivers provide stable current and voltage, ensuring the safety and longevity of LED fixtures.

High Compatibility:
Many LED drivers are designed to be compatible with various types of LED fixtures, making replacement and installation easy.

Protection Features:
LED drivers typically include overload, overheat, and short-circuit protection features, ensuring safe operation of the equipment.



Picture					
Input Power	60W	MEAN WELL 60W	MEAN WELL 100W	MEAN WELL 150W	MEAN WELL 200W
Model	MJ-60-5000-OJ	Meanwell LPV-60-12/24	Meanwell LPV-100-12/24	Meanwell XLG-150W-12/24	Meanwell XLG-200-12/24-A
Input Voltage	100-277V	100-305V	100-305V	100-305V	100-305V
Rated Current	5A	5A / 2.5A	8.5A / 4.2A	12.5A / 6.25A	16A / 8.3A
DC Output	12V	12V / 24V	12V / 24V	12V / 24V	12V / 24V
Waterproof Rating	IP68	IP67	IP67	IP67	IP67
Safety Certification	UL	UL	UL	UL	UL

Picture					
Input Power	Slim 60W	Slim 100W	Slim 150W	Slim 200W	Slim 300W
Model	MJ-1260 (S)	MJ-S100-A12	MJ-S150-A12	MJ-S200-A12	MJ-S300-A12
Input Voltage	100-277V	100-277V	100-277V	100-277V	100-277V
Rated Current	5A	8.3A	12.5A	16.7A	25A
DC Output	12V	12V	12V	12V	12V
Waterproof Rating	IP67	IP67	IP67	IP67	IP67
Safety Certification	ETL & Class P				

Picture	
Input Power	100W
Model	MJ-24100 (2D)
Input Voltage	100-277V, 0-10V & Triac Dimming
Rated Current	4.17A
DC Output	24V
Waterproof Rating	IP67
Safety Certification	UL



LED STRIP

High Flexibility:
LED strips are typically flexible, allowing them to be bent and cut as needed to fit various installation environments.

Various Colors and Brightness:
LED strips offer a variety of color and brightness options, suitable for different lighting needs and ambiance settings.

Easy Installation:
Many LED strips come with adhesive backing, making them easy to install and remove quickly.

APPLICATION

COMMERCIAL AND RESIDENTIAL PARKING LOTS
ALONGSIDE ROADWAYS
SHOPPING CENTERS AND
ENTERTAINMENT VENUES

Picture			
Input Power	4.27W/Ft	2.9W/Ft	4.57W/Ft
Model	JE-00XX-ST-22Z	JE-004W-ST-COB	JE-006M-ST-COB-RGBCW
Input Voltage	DC12V	DC24V	DC24V
LED Type	5050	COB	COB
Viewing Angle	120	180	180
CRI	>80	>80	>80
Lumen Efficacy	100LM/W	100LM/W	100LM/W
Color temperature	Red/Green/Blue/White/RGB	2700K/3000K/3500K/4000K/5000K	RGB+2700K+6500K
Waterproof Rating	IP68	IP20	IP20
Safety Certification	UL	UL	UL

COB Light Accessories

COB Light Accessories			
Model	JE-ST-COB-CNT1/2/3	JE-COB-Channel-V4FT	JE-COB-Channel-6FT

LED ROPE LIGHT

Picture				
Input Power	2.29W/Ft	2.29W/Ft	2.29W/Ft	2.74W/Ft
Model	JE-004W-RN	JE-001R-RN	JE-003B-RN	JE-006M-RN
Input Voltage	AC110V	AC110V	AC110V	AC110V
LED Type	5050	5050	5050	5050
Viewing Angle	120	120	120	120
Color temperature	White	Red	Blue	RGB
Waterproof Rating	IP65	IP65	IP65	IP65
Safety Certification	UL	UL	UL	UL

LED FLEX NEON

High Flexibility & Customization

Vibrant Colors & Dynamic Modes

Easy Installation & Versatile Application



APPLICATION

COMMERCIAL AND RESIDENTIAL PARKING LOTS
ALONGSIDE ROADWAYS
SHOPPING CENTERS AND
ENTERTAINMENT VENUES

Picture						
Input Power	2.44W/Ft	2.44W/Ft	2.44W/Ft	2.44W/Ft	2.44W/Ft	1.52W/Ft
Model	JE-004W-FN-24V-6500K (CC D1225)	JE-001R-FN-24V (CC D1225)	JE-002G-FN-24V (CC D1225)	JE-003B-FN-24V (CC D1225)	JE-006M-FN-24V (CC D1225)	RGBCW
Input Voltage	24V	24V	24V	24V	24V	24V
LED Type	2835	2835	2835	2835	2835	5050
Viewing Angle	120	120	120	120	120	120
Color temperature	White	Red	Green	Blue	RGB+CW	2700K-6500K
Waterproof Rating	IP67	IP67	IP67	IP67	IP67	IP67
Safety Certification	UL	UL	UL	UL	UL	UL

Picture					
Input Power	2.1W/Ft	2.1W/Ft	2.1W/Ft	2.1W/Ft	2.1W/Ft
Model	JE-004W-FN	JE-001R-FN	JE-002G-FN	JE-003B-FN	AC110V / DC24V
Input Voltage	AC110V / DC24V				
LED Type	2835	2835	2835	2835	2835
Viewing Angle	120	120	120	120	120
Color temperature	White/Warm White	Red	Green	Blue	
Waterproof Rating	IP67	IP67	IP67	IP67	IP67
Safety Certification	UL	UL	UL	UL	UL

Mounting Accessories

Picture				
Model	JE-FN-01	JE-FN-02	JE-FN-03	JE-FN-04
Type	Front Feed Cap	Tall Cap	Curved-profile	Flexible LED Neon Cutter & File Set
Material	Silicone	Silicone	Stainless steel	Silicone
Picture				
Model	JE-FN-05	JE-FN-06	JE-FN-07	JE-FN-08
Type	Silicone Adhesive	Aluminum mounting clips	Aluminum profile	Bottom Feed Cap (Cable not included)
Material	Silicone adhesive	Aluminium	Aluminium	Silicone



LED MODULE

Compact and Lightweight:
Small LED modules are designed to be compact and lightweight, making them easy to install and arrange.

High Brightness and Rich Colors:
These modules provide high brightness output and can achieve various colors, suitable for diverse application needs.

Weather Resistant:
Many small LED modules are weatherproof and durable



UP DOWNLIGHT

APPLICATION

HOME LIGHTING
COMMERCIAL SPACES
ART DISPLAY



Dual Directional Lighting:
Up downlights are designed to emit light both upwards and downwards, providing a broader lighting effect.

Energy Efficient:
These fixtures typically use LED technology, offering high energy efficiency and effectively reducing energy consumption and electricity costs.

Modern Design:
Up downlights often feature a sleek and modern appearance, making them suitable for various interior decor styles.



Picture				
Input Power	0.72W	1W	1.2W	0.72W
Model	JE-00XX-18LM/JE-00XX-24	JE-004CW-18LM/JE-004CW-24	JE-004CW-10L/JE-004W-24	JE-006M-40
Input Voltage	DC12V	DC12V	DC12V	DC12V
LED Type	2835	2835	5730	5050
Viewing Angle	Milky:160/Clear:120	Milky:160/Clear:120	Clear:120/Milky:160	Clear:120
Lumen Efficacy	100LM/W	100LM/W	100LM/W	/
Waterproof Rating	IP65	IP65	IP65	IP65
Color temperature	Warm White/Pure White/Cool White/Red/Green/Blue	Cool White	Pure White/Cool White	RGB Full Color Chasing
Safety Certification	UL	UL	UL	UL

Picture				
Input Power	0.72W	0.96W	1.5W	3W
Model	JE-006M-24	JE-006M-43 (0.96W RGBW)	JL-00XX-42-110V	JL-00XX-44-110V
Input Voltage	DC12V	DC12V	AC110V	AC110V
LED Type	5050	5050	2835	2835
Viewing Angle	Milky:160	Milky:160	Milky:170	Milky:170
Lumen Efficacy	/	/	100LM/W	100LM/W
Waterproof Rating	IP65	IP65	IP65	IP65
Color temperature	RGB	RGB+6500K	Cool White/Red/Green/Blue	Cool White/Red/Blue
Safety Certification	UL	UL	UL	UL



LED MIRROR LIGHT

APPLICATION

BATHROOM,
MAKEUP ROOMS
BEDROOM DECORATION

High Brightness:
LED mirror lights provide high brightness output, ensuring clear visibility under various lighting conditions.

Energy-Efficient Design:
These fixtures are designed for high energy efficiency, effectively reducing energy consumption and electricity costs.

Multiple Color Temperature Options:
LED mirror lights typically offer various color temperature options, allowing users to choose between warm and cool light as needed.



Picture				
Input Power	25W	20W	25W	25W
Model	SZ-MIR25W-01-CCT	SZ-MIR20W-02-CCT	SZ-MIR25W-03-CCT	SZ-MIR25W-04-CCT
Input Voltage	120V	120V	120V	120V
LED Type	2835	2835	2835	2835
CRI	>80	>80	>80	>80
Dimmable	Traic	Traic	Traic	Traic
Lumen Efficacy	60LM/W	67LM/W	68LM/W	70LM/W
Dimension	22inch	24inch	16-24inch	24inch
Color temperature	Adjustable- 2700K/3000K/3500K/4000K/5000K	Adjustable- 2700K/3000K/3500K/4000K/5000K	Adjustable- 2700K/3000K/3500K/4000K/5000K	Adjustable- 2700K/3000K/3500K/4000K/5000K
Safety Certification	ETL	ETL	ETL	ETL

OTHER LIGHTING

More products are under development.
You can enter our website by scanning the home page or the QR code below to view our new products in real time.

Picture			
Type	LED Track Light	Under cabinet Light	LED Security Light
Input Power	15W	9W	40W
Model	SZ-TRC15W-CCT	SZ-UC9WN18-PIR-D-CCT	SZ-SS40W3A6-5000K
Input Voltage	120-277V	120V	120V
LED Type	5050	2835	2835
CRI	>90	>80	>70
Dimmable	Triac	Triac	/
Lumen Efficacy	90LM/W	80LM/W	100LM/W
Color temperature	Adjustable: 3000K/4000K/5000K	Adjustable: 2700K/3000K/3500K/4000K/5000K	5000K
Waterproof Rating	IP65	/	IP65
Safety Certification	ETL	ETL	/
Function	/	PIR+Light Sensor	Infrared sensor,Dusk to down

Picture			
Type	LED Garden light	LED Garden light	LED Garden light
Input Power	Adjustable: 100W/120W/150W	25W	25W
Model	SZ-GL150W-P-ACP	SZ-BFL25WP-CCT (120-277V)	SZ-BFL25WP-CCT (12V)
Input Voltage	120-277V	120-277V	12V DC
LED Type	2835	2835	2835
CRI	>70	>80	>80
Dimmable	0-10V	/	/
Lumen Efficacy	135LM/W	120LM/W	120LM/W
Color temperature	Adjustable: 4000K/5000K	Adjustable: 2700K/3000K/4000K	Adjustable: 2700K/3000K/4000K
Waterproof Rating	IP65	IP65	IP65
Safety Certification	UL	UL	UL
Function	Photocell	/	/

Picture			
Type	LED Bollard Light	LED Pendant Light	LED Recessed Light
Input Power	Adjustable: 14W/19W/24W	30W	Adjustable: 25W/30W/40W
Model	SZ-BL24WXX-P-ACP	SZ-PDL30W327-CCT	SZ-LRL40W-4FT-ACP
Input Voltage	120-277V	120-277V	120-277V
LED Type	2835	LED COB	2835
CRI	>70	>90	>80
Dimmable	0-10V	Triac	0-10V
Lumen Efficacy	140LM/W	80LM/W	100LM/W
Color temperature	Adjustable: 3000K/4000K/5000K	Adjustable: 2700K/3000K/3500K/4000K/5000K	Adjustable: 3500K/4000K/5000K
Waterproof Rating	IP65	IP20	IP20
Safety Certification	UL & DLC	ETL	ETL
Function	Photocell	Angle:10-80°	/



EMERGENCY DRIVER

APPLICATION
EMERGENCY LIGHTING
SAFETY EQUIPMENT



Automatic Switching:
Many emergency supplies feature automatic switching capabilities, allowing for quick transition to backup power during outages.

Long-lasting Batteries:
These supplies are typically equipped with high-performance batteries that can provide sustained power during outages.

High Reliability:
Emergency supplies are designed to provide reliable power support at critical moments, ensuring safety and functionality.

CONTROLLER
AC SWITCH
SENSOR

APPLICATION
LIGHTING CONTROL
LIGHT SHOWS AND EVENTS
SMART HOME SYSTEMS

Multiple Control Methods:
LED controllers typically support various control methods, such as remote control, app control, and voice control, providing a flexible operating experience.

Dimming and Color Adjustment:
Many LED controllers feature dimming and color adjustment capabilities, allowing users to modify the brightness and color of the lights as needed.

High Compatibility:
LED controllers are generally compatible with various types of LED fixtures, making integration and use convenient.

Picture			
Input Voltage	/	12-24V DC	/
Model	SZ-MS-RC1	HM-12RGB5A3-3A5WB	HM-12RGB5A3-3A5WB-RC
Output	/	6Channel, 15A/Channel	RGB/RGBW/RGB+CCT
Function	For:SZ-MS-MH/MH1 SZ-PS-A	WiFi&Bluetooth 5 in 1	Remote Controller

Picture			
Input Voltage	5-24V DC	5-24V DC	9-24V DC
Model	HM-12RGB5A3-6A4EX	SP901E	HM-12RGB5A3-3A5BT
Output	4Channel,6A/Channel	/	5Channel, Max15A
Function	RGBW Amplifier	Signal Amplifier	RGB+CCT Bluetooth Controller

Picture			
Input Voltage	9-24V DC	5-24V DC	5-24V DC
Model	HM-12RGB5A3-3A5WF1	SP105E	SP107E
Output	5Channel, Max15A	2048 pixels	960 pixels
Function	RGB+CCT Wifi Controller	Full Color APP control	Full Color APP Music control

Picture			
Input Voltage	120-277V	120-277V	120-277V
Model	SW-0-10V Dim	SW-One Way/SW-Three Way	SW-PIR Sensor
Function	Single pole & 3 way 0-10V dimmer	Single pole & 3 way Swith	Occupancy Sencor/Vacancy Sensor
Safety Certification	ETL	UL	UL

Picture			
Input Voltage	120-277V	120-277V	12V DC
Model	SZ-MS200W-PIR (IP65)	SZ-Photocell-3000W (IP65)	SZ-MS-LS
Function	PIR Sensor	Photocell	Motion Sensor & Photocell
Waterproof Rating	IP65	IP65	IP20
Safety Certification	/	UL	/

Picture				
Input Voltage	12V DC	12V DC	12V DC	12V DC
Model	SZ-MS-P	SZ-MS-M	SZ-MS-MH1	SZ-PS-A
Function	PIR Sensor	MICROWAVE Sensor	Motion Sensor & Photocell	Photocell
Waterproof Rating	IP20	IP20	IP65	IP65
Safety Certification	UL	UL	UL	UL

Picture			
Input Power	12W	15W	8W
Model	SZ-EM8W-PL/SZ-EM20W-PL	SZ-EM40WR-HB	SZ-EM8W-300V-WP/SZ-EM15W-300V-WP
Input Voltage	100-347V	100-347V	100-347V
Output Voltage	170V DC	170V DC	60-300V DC
Output Power	8W / 20W	40W	8W / 15W
Emergency Time	90minutes	90minutes	90minutes
Ambient Temperature	5°C~50°C	5°C~50°C	5°C~50°C
Safety Certification	UL	UL	UL



POLE AND BRACKET

APPLICATION

STREETLIGHT INSTALLATION
BILLBOARD SUPPORT
SECURITY SURVEILLANCEOptional Type: Square/Round/Cone
Available Size: 20/25/30/39FT, 4"/5"/9"

SZ-4R1	SZ-4S1	SZ-4R-1R	SZ-5R-1R	SZ-5S-4S1	SZ-5S1

SZ-3R2	SZ-4S2	SZ-4SR2	SZ-4S3	SZ-4S3Y	SZ-4S4C	SZ-4S3T

SZ-P2	SZ-P3	SZ-P4	SZ-P5	SZ-BL-SP	SZ-BL-RP

Streetlight Installation:

Poles and brackets are commonly used to install streetlights, providing illumination for urban and rural roads to ensure the safety of pedestrians and vehicles.

Billboard Support:

These brackets can be used to support outdoor billboards, ensuring visibility and stability of the advertising content.

Security Surveillance

Poles and brackets can be used to install surveillance cameras, providing security monitoring and surveillance capabilities.

Easy Installation:

These brackets are designed for easy installation and adjustment, accommodating various mounting needs and environments.

Various Specifications:

Poles and brackets come in a variety of heights and sizes to meet the needs of different applications.



BODY STRIP

Picture			
Dimension	4FT	8FT	8FT
Model	SZ-BD-4FT2 (G13)	SZ-VT-8FT2 (FA8)	SZ-BD-8FT (FA8/G13)
Safety Certification	ETL	ETL	ETL
Function	For 2PCS G13 T8 Tube	For 2PCS Vapor Tight	For 2PCS x 8ft / 4PCS x 4FT FA8/G13

